
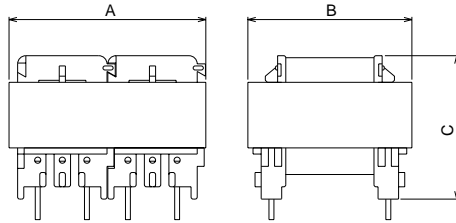


CHOKE COIL FOR PREVENT HARMONICS

These choke coils can be used in coil for prevent harmonics.
 CW series are available for television and display.
 Applicable to custom order.


Applications ●Television ●Display ●Personal computer ●OA equipment

●TYPE CW Low leakage flux type




Model	A	B	C	L	
				100V system	200V system
CW5010	50.0	40.0	29.0	7mH 2.4A	30mH 1.15A
CW5015	50.0	40.0	35.0	7mH 3.0A	30mH 1.4A
CW5018	50.0	40.0	36.5	7mH 3.3A	30mH 1.6A

●TYPE CP

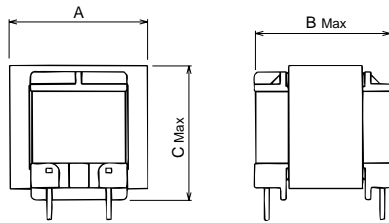

Model	A	B	C	L	
				100V system	200V system
CP2815	28.5	29.0	29.0	15mH 1.0A	60mH 0.5A
CP3515	35.5	32.5	33.5	15mH 1.5A	60mH 0.75A
CP4119	41.5	38.0	36.0	10mH 2.2A	40mH 1.1A

●TYPE CL

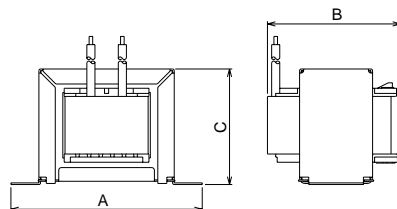

Model	A	B	C	L	
				100V system	200V system
CL3510	54.0	32.0	32.0	15mH 0.8A	60mH 0.4A
CL4116	60.0	39.0	36.0	10mH 1.4A	40mH 0.7A
CL4118	60.0	41.5	36.0	10mH 1.6A	40mH 0.8A
CL4818	68.0	42.0	43.0	10mH 1.8A	40mH 0.9A
CL4825	68.0	48.0	43.0	10mH 2.6A	40mH 1.3A
CL5725	81.0	55.0	54.0	10mH 3.0A	40mH 1.3A

L means inductance at AC50/60Hz