



REACTOR FOR ACTIVE FILTER

These Reactors with specific cores for preventing harmonics, which can be best used for various Active Filters, U.P.S and inverter.

Low loss and Low noise type reactor.

Applications ● Inverter air conditioners ● U.P.S. ● Soler Invertor

● TYPE SI

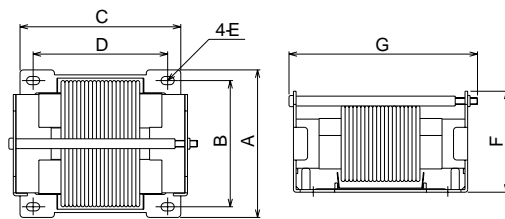

Model	A	B	C	D	E	F	Max G
SI5015	78.0	66.5	77.5	63.5	5.0×8.0	50	100
SI5020	78.0	66.5	77.5	63.5	5.0×8.0	55	100
SI5025	78.0	66.5	77.5	63.5	5.0×8.0	60	100
SI5030	78.0	66.5	77.5	63.5	5.0×8.0	65	100
SI6020	90.0	77.0	98.0	82.0	5.0×8.0	55	125
SI6030	90.0	77.0	98.0	82.0	5.0×8.0	65	125
SI6040	90.0	77.0	98.0	82.0	5.0×8.0	75	125
SI7025	100.0	87.0	116.0	100.0	5.0×8.0	60	145
SI7030	100.0	87.0	116.0	100.0	5.0×8.0	65	145

DC SUPERIMPOSITION CHARACTERISTICS FOR EXAMPLE.

